


tigerflex®

NEW!

Series 8793DH Gasoline Drop Hose

A new innovation in Gasoline Drop Hoses — the driver-friendly drop hose that is easier to use, lasts longer, and costs less!

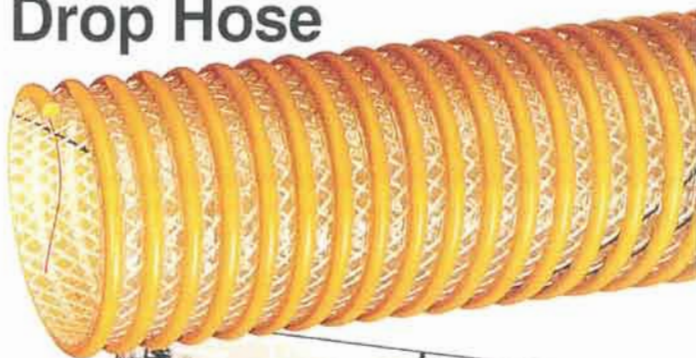

Features & Benefits

- **Clear non-permeable polyurethane construction** — Series 8793DH drop hoses remain crack- and leak-resistant under the harshest of conditions. They easily handle gasoline/fuel blends made with MTBE's, methanol, ethanol, toluene, naphthas, kerosene, benzene and MEK without degradation (aromatic content not to exceed 50%). And they remain super-flexible, even in sub-zero weather. "See-through" construction allows visual confirmation that gasoline is flowing.
- **Polyester fabric reinforcement** — provides increased flexibility and improves ability to handle

positive working pressures.

- **Exposed yellow PVC helix** — highly abrasion-resistant and light weight . . . Series 8793DH drop hoses are far easier to handle than conventional TPR/rubber hoses because they slide more easily and are lighter than any other drop hose.
- **Embedded copper static wire** — provides positive grounding to prevent static build-up.
- **Service temperature range:** -40°F to +150°F. (Actual service temperature range is application-dependent).

Series	Nominal ID (In.) (mm)	Nominal OD* (In.) (mm)	Working Pressure† (PSI @ 68° F)	Min. Bending Radius (In. @ 68° F)	Standard Lengths (Ft.)	Approx. Wt. (lbs./ft.)
8793-303	3.03 76.9	3.70 93.9	65	6	20/57/100	1.10
8793-404	4.04 102.6	4.82 122.4	65	8	20/57/100	1.50


* Measured over helix

† Maximum constant pressure at 68° F.

Safety Factor 4:1

Note: Service life may vary depending on operating conditions and type of fuels being conveyed.

Banding Sleeves for Series 8793DH Gasoline Drop Hoses‡



Series	Fits Hose	Color	Standard Length	Weight (lbs/ea.)
SLV-YL 3X3	8793-303	Bright Yellow	3 Ft.	3.7
SLV-YL 4X3	8793-404	Bright Yellow	3 Ft.	5.3

‡ Note: Banding sleeves (minimum 12" length) are required on each end to relieve stress behind each fitting.