


OIL AND FUEL - CARBOFLEX 10

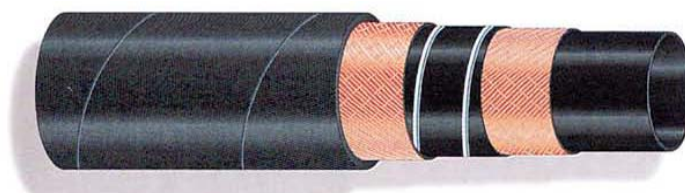

Structure :	NBR smooth black innertube. Textile reinforcement. Copper wire. Anti deflection embedded spiral. CR cloth impression smooth black cover.
Applications :	Oil-bearing liquids suction and delivery hose, with aromatic percentage max 50%.
Branding :	Red transfer RAPISARDA CARBOFLEX 10 BAR ITALY Other sizes available upon request
Working Pressure :	10 bar
Burst Pressure :	40 bar
Temperature :	-30°C (-22°F) to 70°C (158°F)
Length :	40 mt
Tolerance :	According to ISO 1307/92

MEASURES	
Size	Weight (Kg/mt)
19X29	0,54
25X35	0,67
30X41	0,86
32X43	0,91
35X46	1
38X51	1,29
40X52	1,24
42X55	1,43
45X59	1,66
50X62	1,6
60X73	2,05
63X76	2,12
70X86	2,95
75X91	3,15
80X96	3,34
90X106	3,78
100X114	3,98
125X145	6,98
150X168	7,46