


OIL AND FUEL - CARBOFLEX 16 CON

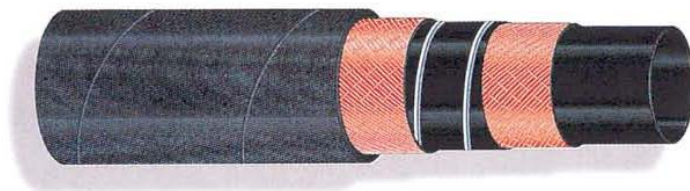

Structure :	NBR smooth black innertube. Textile reinforcement. Copper wire. Anti deflection embedded spiral. CR cloth impression conductive smooth black cover.
Applications :	Oil-bearing liquids suction and delivery hose, with aromatic percentage max 50%
Branding :	Red transfer RAPISARDA CARBOFLEX 16 BAR CON ITALY Other sizes available upon request
Working Pressure :	16 bar
Burst Pressure :	64 bar
Temperature :	-30°C (-22°F) to 70°C (158°F)
Length :	40 mt
Tolerance :	According to ISO 1307/92

MEASURES	
Size	Weight (Kg/mt)
50X64	1,9
63X76	2,25
76X90	2,7
100X116	4,2