


TECHNICAL GASSES - R5R LPG HOSE

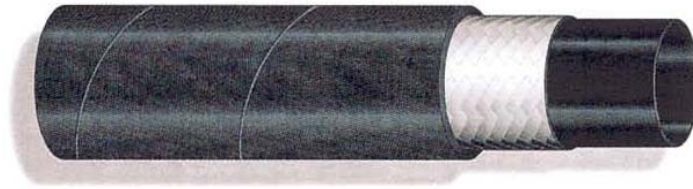

Structure :	NBR extruded smooth black innertube. AISI 316 stainless steel wire braid. CR cloth impression pin-pricked black cover.
Applications :	LPG delivery hose according to BS 4089 standards.
Branding :	According to BS 4089 standards. Other sizes available upon request
Working Pressure :	25 bar
Burst Pressure :	100 bar
Temperature :	-20°C (-4°F) to 45°C (113°F)
Length :	Variabile in base al diametro. Depending upon size.
Tolerance :	According to ISO 1307/92

MEASURES	
Size	Weight (Kg/mt)
4,8X13,2	0,23
10X19,4	0,33
12,7X23,4	0,54
15,9X27,4	0,67
22X31,4	0,71
25X35	0,87
28,6X38,3	0,92
34,9X44,5	1,06
46X56,4	1,47
60,3X73	2,23